

DATA SHEET



Structural Wrap, LLC


GENERAL FEATURES

This specification defines the integrated design requirements for the Advanced Equipment and Services Brackish Water Reverse Osmosis Systems - Large Series for the Industrial, Commercial and Municipal markets.

All required equipment for independent operation is provided given the necessary pretreatment precautions taken.

Design basis includes system with centrifugal pump as well as cartridge filter system.

Although this configuration is based on a skid mounted system, Containerized and Solar options are available upon request. Custom configurations also available based on customer specific needs.

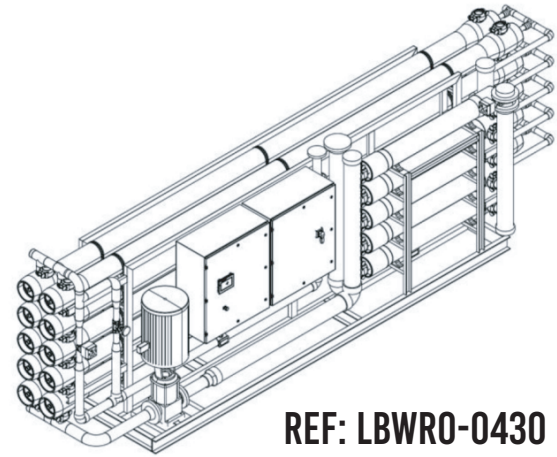

REF: LBWRO-0430

DESCRIPTION

Single pass, single stage, ten (10) pressure vessels total. Each pressure vessel contains six (6) thin-film composite elements in series for a total of sixty (60). System produces 1630 m³/day (430,000 GPO or 300 gpm) of product water at 75% recovery.

COMPONENTS

TDS	500-550 mg/l (as Naci)
SDI 15	< 3.0
TEMPERATURE	25 to 35QC (77 to 95° F)
RECOVERY	70 to 75%
NOMINAL REJECTION	>98%
INCOMING POWER	460V 60Hz
POWER CONSUMPTION	0.6-0.7 Kwhr/KGal

Note: Required 3bar (45psi) minimum customer supplied pressure to high pressure RO Feed Pump. Temperatures and high salinities will reduce system productivity.

CONTROL AND POWER

- PLC with Ethernet card and spare cards
- 6-inch HMI
- Remote start/stop & alarm capabilities
- Zero recovery flush on shutdown
- Power: 460V, 3 phase, 60Hz
- Remote control and monitoring

OPERATING PARAMETERS

- Skid designed for oversea transportation
- High Pressure Centrifugal RO Feed Pump w/ 220/460V 3 phase 50/60 Hz TEFC motor
- Energy Recovery Device Turbo Charger upon request
- VFD for RO Pump
- Digital flowmeteres
- PLC
- Pressure transducer: High and low
- Isolation butterfly valves

CONTACT INFO

Structural Wrap LLC
8725 SW 129th Ter Miami FL 33176
Single Point of Contact:
Justin Alley
justin@structuralwrap.com
808.825.2701
www.structuralwrap.com



FEATURES AND BENEFITS

MATERIALS OF CONSTRUCTION

POWER DISTRIBUTION PANELS	NEMA 12
CONTROL ENCLOSURE	NEMA 12
HIGH PRESSURE PIPING	3165S
LOW PRESSURE PIPING	PVC Sch 80
HIGH PRESSURE TUBING	Parflex
LOW PRESSURE TUBING	Polyethylene
PRESSURE VESSEL RACK	AL - Powder coated
MULTIMEDIA FILTERS	FRP - optional
PVC SAMPLE VALVES	On each vessel, feed, permeate and reject

INSTRUMENTS

CONDUCTIVITY	Permeate product
LOW METERS DIGITAL	Reject and Permeate
CONDUCTIVITY	RO Feed and Discharge RO pump
PRESSURE GAUGES	Liquid filled for high & low pressures

PHYSICAL DATA & DIMENSIONS

DRY WEIGHT	8700 lbs
OPERATING WEIGHT	11,900 lbs
DIMENSIONS	280" X 80 X 50"
PIPING CONNECTIONS	
FEED	6"
PERMEATE	4"
REJECT	3"
POWER CONSUMPTION	0.6 - 0.7 Kwh/1000 Gallons

MEMBRANE AND HOUSINGS

- Multi Ported FRP pressure vessel design, 300psi rated
- Spiral wound thin film composite membranes 98% nominal salt rejection.

ALARMS

- Low pump suction pressure
- High pump pressure discharge
- Permeate water quality
- Low permeate flow
- High permeate flow
- Low reject flow
- Low/high voltage
- Phase protection
- Pump motor overload
- High membrane feed pressure
- Chemical tank protection level
- Integral permeate flush and CIP system optional

OPTIONALS

- ASME Code stamped pressure vessels
- Post-treatment degasifier
- 400 V, 3 Ph, 50 Hz fuse, A/C, Lighting kit
- pH meter and H2SO4 chemical feed
- NaOCl pretreatment chemical feed
- SBS chemical feed
- Installation and commissioning
- Supervision/services are available

CONTACT INFO

Structural Wrap LLC
 8725 SW 129th Ter Miami FL 33176
 Single Point of Contact:
 Justin Alley
 justin@structuralwrap.com
 808.825.2701
 www.structuralwrap.com